

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

***This Page Blank (uspto)***

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 911 762 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

28.04.1999 Bulletin 1999/17

(51) Int Cl.<sup>6</sup>: G07B 15/00

(21) Application number: 98308561.4

(22) Date of filing: 20.10.1998

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 21.10.1997 JP 288148/97

(71) Applicant: HITACHI, LTD.

Chiyoda-ku, Tokyo (JP)

(72) Inventor: Kikuchi, Yoshinori

Yokohama-shi (JP)

(74) Representative: Calderbank, Thomas Roger et al

MEWBURN ELLIS

York House

23 Kingsway


London WC2B 6HP (GB)

(54) A method of providing service for users and a service processing system for the same

(57) A service processing system includes an IC card (103) possessed by a passenger and at least one automatic ticket inspection machine (101, 102) installed in each station of a traffic facility. The card includes a storage (205) for keeping therein a stored value assigned as an equivalent for utilization of a service and service points supplied in association with a utilization state of services and an interface unit (207) to achieve data communication with an external device. The machine (101, 102) includes a reader/writer (301) to communicate data with the IC card. The machine (101, 102) transfers, when the passenger enters a platform through

the machine of the station for the traffic facility, entrance information (Fig. 7, 501) related to the station to the IC card. The IC card keeps the entrance information and transfers, when the passenger leaves a platform via the machine of a destination station, the entrance information to the machine. In accordance with the entrance information, the machine creates exit information representing a state of utilization of the traffic facility and sends the exit information to the IC card. On receiving the exit information, the IC card calculates service points in accordance with the received exit information and the utilization state.

FIG. 1

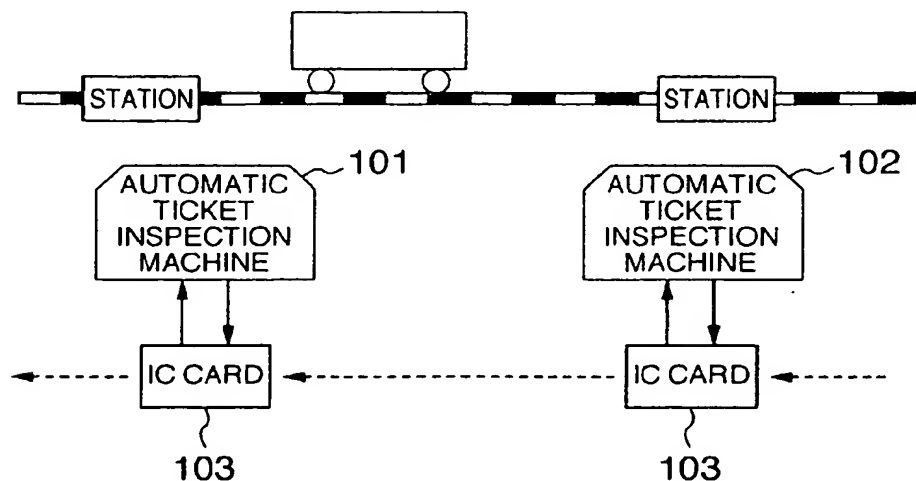

## Description

**[0001]** The present invention relates to a method of providing services for customers and users, and in particular, to a service processing system for use with a traffic facility such as a railway transportation or facility in which a point service is carried out in accordance with a state of utilization of each user.

**[0002]** Heretofore, there has been known as one of the customer services a so-called "point service" in which points are assigned to each customer in accordance with transaction data of an amount of transaction or the like in a transaction processing in a shop or a store such that when the accumulated number of points of the customer becomes equal to a predetermined number of points (target number of points), an article or a merchandise coupon is given to the customer. JP-A-5-324998, JP-A-6-266970, JP-A-7-65243, etc. describe technologies related to the point service of this kind.

**[0003]** In these service processing systems above, service points are calculated in accordance with the utilization state of each customer by a host system or a high-order system of a point of sales (POS) system or the like and the calculated result is recorded in an IC card issued to the customer in advance. Moreover, when changing a rate of addition of service points for each customer, the host system or the high-order system refers to data of the rate of addition beforehand stored for the customer so as to appropriately calculate the service points in accordance with the rate.

**[0004]** In accordance with the prior art, the service points are calculated by the host system or the high-order system such as the POS system. Consequently, the service points are fixedly set to a table arranged in the high-order system. When it is desired to provide more precise satisfactory services, for example, when the service points are to be changed in accordance with the utilization state of each customer, it is required for the host system to manage the utilization state of each customer in a concentrated fashion for the calculation of service points in accordance with the utilization state. In consequence, it is necessary for the host system to execute transaction processing for any transaction, which leads to a problem that the load imposed on the host system becomes heavier and hence the processing response time is elongated. On the other hand, in a case in which such a point service is to be introduced to a passenger traffic facility such as a railway transportation, there may be executed processing to calculate points when a passenger enters or leaves a platform of a station through an automatic ticket inspection machine installed at a wicket of the station. Since a high processing speed is required in this case, the conventional technology described above cannot be applied to the system.

**[0005]** It is therefore an object of the present invention, which is devised to solve the problem of the prior art, to supply each customer with service points in a

more precise manner in accordance with the utilization state of the customer and to supply service points to the customer with a high degree of freedom in various fashions in accordance with information of the customer.

**[0006]** To achieve the object above, there is provided a service processing system in accordance with the present invention including an IC card possessed by a user or passenger and an automatic ticket inspection machine arranged in each station of the pertinent transportation facility. The IC card includes storage means for keeping therein a stored value supplied as an equivalent for utilization of a service and service points supplied in association with a service utilization state and interface means for conducting data communication with an external device. The automatic ticket inspection machine includes a reader/writer for accomplishing data communication with the IC card, means for transferring, when the passenger enters a platform of a station through the machine to access the transportation facility, entrance information related to the starting station to the IC card, and means for receiving, when the passenger leaves a platform of a station through the machine, the entrance information from the IC card, creating exit information representing a utilization state of the facility in accordance with the entrance information, and transferring the exit information to the IC card. Additionally, the IC card includes means for receiving and keeping therein the entrance information and means for calculating service points in accordance with a utilization state associated with the received exit information.

**[0007]** The objects and features of the present invention will become more apparent from the consideration of the following detailed description taken in conjunction with the accompanying drawings in which:

Fig. 1 is a configuration diagram of an embodiment of a system in accordance with the present invention;

Fig. 2 is a block diagram showing an internal structure of an IC card;

Fig. 3 is a diagram showing an example of a table layout of a management information table;

Fig. 4 is a diagram showing an example of an accumulated information table;

Fig. 5 is a block diagram showing an internal configuration of an automatic ticket inspection machine;

Fig. 6 is a flowchart showing a procedure of processing executed between the IC card and the ticket inspection machine when a passenger enters a platform through the machine;

Fig. 7 is a diagram for explaining entrance information which the IC card receives from the IC card reader/writer;

Fig. 8 is a flowchart showing a procedure of the IC card when a passenger leaves a platform through the ticket inspection machine;

Fig. 9 is a diagram for explaining exit information

which the IC card receives from the IC card reader/writer when a passenger leaves a platform through the machine;

Fig. 10 is a diagram for explaining historical information;

Fig. 11 is a flowchart showing a procedure of processing of the automatic ticket inspection machine when a passenger leaves a platform through the machine;

Fig. 12 is a diagram for explaining a fare calculation table of the automatic ticket inspection machine; and

Fig. 13 is a diagram for explaining a distance calculation table of the automatic ticket inspection machine.

**[0008]** Fig. 1 shows in a configuration diagram an embodiment of a point service processing system related to the railway fare in accordance with the present invention. In the diagram, 101 and 102 denote automatic ticket inspection machines installed at a wicket of each station to communicate data with an IC card 103 via an input/output section thereof. The IC card 103 is used by a passenger. In this embodiment, the IC card 103 is a non-contact IC card for which the IC card/reader/writer can conduct read and write operations without any physical contact therewith. When entering or leaving a platform of a station through the ticket inspection machine 101, 102, the passenger holds the IC card 103 to pass it over the input/output section of the machine 101, 102. The IC card 103 is used to manage customer information of the holder of the card, utilization of trains, history of travels, a balance of stored value, service points, etc. The machine 102, 102 communicates information with the IC card 103 to carry out processing such as management and control passages of travelers as well as calculation of the fare.

**[0009]** Fig. 2 shows in a block diagram an internal structure of the IC card 103. In the diagram, 201 denotes a central processing unit (CPU) to conduct fundamental processing, control, and storing operation as a computer. Numeral 202 indicates a random access memory to be accessed by the CPU 201 for its processing. Numeral 203 is a clock (CLOCK) section to supply a clock signal necessary for operation of each section of the IC card 103. Numeral 204 designates a read-only memory (ROM) in which such programs to operate the IC card as an operating system and application programs to implement the point service of the embodiment are written. In this embodiment, various functions of the IC card 103 are achieved when the CPU 201 executes programs read from the ROM 204. Numeral 205 is an electrically erasable programmable ROM (EEPROM) including a nonvolatile memory including a management information table 220 in which information such as personal information is recorded, a historical information table 230 to store therein history of utilization, and an accumulated information table 240 in which accumulated information

of utilization state is recorded. Numeral 206 is a power source to supply power necessary for operations of respective sections of the IC card 103. Numeral 207 indicates an input/output control section (I/O) to conduct data communication with the IC card reader/writer. These constituent elements are connected via a bus 208 to each other.

**[0010]** Fig. 3 shows in a table layout diagram an example of the management information table in the EEPROM 205. The management information table 220 includes a personal information record area 610 to which a name, an address, and the like of a passenger having the IC card 103 are registered, an entrance information registration area 601 to which entrance information is registered when the passenger passes through the ticket inspection machine by use of the IC card 103, a stored value balance record area 602 in which a value balance kept by the IC card 103 is recorded, and a service point accumulated value area 603 in which an accumulated value of service points is recorded.

**[0011]** Fig. 4 shows in a configuration diagram an example of the accumulated information table. As can be seen from the diagram, the accumulated information table 240 includes an accumulated distance field 1101 indicating a traveled distance accumulated for each month, an accumulated fare field 1102 denoted an accumulated fare for each month, and an accumulated travel count field 1103 representing an accumulated value of travels for each month.

**[0012]** Fig. 5 shows in a block diagram an internal constitution of the automatic ticket inspection machine 101, 102. Numeral 301 indicates an IC card reader/writer to communicate data with the IC card 103. Numeral 302 stands for a ticket inspection controller which calculates the fare and the traveled distance and which controls the machine 101, 102. Numeral 303 is a human sensor to detect a human passing through the machine 101, 102. Numeral 304 is door installed in the machine 101, 102 to be closed, when an incorrect passage is detected, so as to hinder the passenger to pass through the machine 101, 102.

**[0013]** Fig. 6 is a flowchart of processing to be executed when the passenger enters a platform of a station through the ticket inspection machine 101, 102 in which the passenger holds the IC card 103 to pass it over the IC card reader 301 of the machine 101, 102. Referring now to the flowchart of Fig. 6, description will now be given of a processing procedure conducted when the passenger enters the platform through the machine 101, 102. When the IC card is placed over the reader/writer 301, communication is established between the reader/writer 301 and the IC card 103 and then a check is conducted therebetween (step 401). When the check is finished, the controller 302 of the machine 101, 102 creates entrance information and sends the information via the reader/writer 301 to the IC card 103 (step 402). Fig. 7 shows an example of the entrance information transferred from the machine 101, 102 to the IC card 103. As

shown in Fig. 7, the entrance information 501 includes entry fields such as an entrance date field 502 indicating a date on which the passenger enters the platform of the station through the machine 101, 102, an entrance time field 503 denoting a point of time of entrance, and an entrance station name field 504 indicating a station in which the machine 101, 102 is installed. The entrance information sent from the machine 101, 102 is stored in the entrance information registration area 601 of the management information table 220 (step 403).

[0014] When the passenger leaves the platform through the machine 101, 102, the passenger similarly holds the IC card 103 to pass it over the reader/writer 301 as in the case in which the passenger enters the platform. Fig. 8 is a flowchart showing a processing procedure executed in the IC card 103 in this situation. When the passenger places the IC card 103 over the reader/writer 301 for the passage through the machine 101, 102, communication is established between the reader/writer 301 and the IC card 103 and then a check is conducted therebetween (step 801). When the communication is established and the check is finished therebetween, entrance information is read from the entrance information registration area 601 of the management information table 220. The obtained information is transmitted from the I/O controller 207 to the reader/writer 301 of the machine 101, 102. The data transmitted in this operation is substantially the same as that shown in Fig. 6 (step 802). Next, the IC card 103 receives exit information sent from the reader/writer 301. Fig. 9 is a diagram for explaining an example of the exit information. As can be seen from this diagram, the exit information 903 includes information items such as a date of entrance, a time thereof, a station name thereof, a time of exit, a station name thereof, a fare of section traveled 901, and a distance traveled 902 (step 803). On receiving the exit information 903, the IC card 103 subtracts an amount of the fare indicated by the fare field 901 from a value balance indicated by the stored value balance field 602. The IC card 103 then stores the resultant value as a value balance in the balance field 602. Assume, for example, "2350" is stored in the balance field 602 and "180" is stored in the fare field 903 of the exit information 903. The value of the balance field 602 is accordingly updated to "2170" by subtracting the latter from the former (step 804). After the update of the balance field 602, there is created historical information in accordance with the exit information 903. The historical information is recorded in the historical information table 230 of the EEPROM 205. As shown in Fig. 10, the exit information is adopted as the historical information. Stored in the historical information table 230 is historical (exit) information in a sequence of the entrance date (step 805). Additionally, the IC card 103 calculates accumulated information for the current month in accordance with the exit information and stores the obtained information in the accumulated information table 240. Specifically, the traveled distance 902 of the exit information

is added to the accumulated value of traveled distance in the accumulated distance field 1101 corresponding to the current month to be stored as a new accumulated value of traveled distance in the accumulated distance traveled 1101. Similarly, the fare of the exit information is added to the accumulated value of fare in the accumulated fare 1102 corresponding to the current month to be stored as the accumulated value of fare in the accumulated fare field 1102. Furthermore, one is added to the travel count recorded in the accumulated travel count field 1103 (step 806). Subsequently, service points are calculated in accordance with the exit information and the accumulated information kept in the accumulated information table 240. Assume, for example, that the service points are obtained as a sum of the traveled distance and a value attained by multiplying the traveled distance by a percent value represented by one percent of the total of the accumulated distance traveled for the last month and that of the second last month. Under this condition, when the traveled distance of the exit information 903 is "20" and the total of the accumulated distance traveled for the last month and that of the second last month is "580" as shown in Fig. 4, the service points are calculated as

$$20 + 20 \times (580 \times 0.01)/100 = 21$$

In the calculation of service points, the personal information kept in the management information table 220 may be used if necessary (step 807). The service points obtained in step 807 are added to the value recorded in the accumulated point area 603. Thereafter, the area 603 is updated to the value resultant from the addition (step 808). After the accumulated service point area 603 is updated, in accordance with the exit information, the accumulated information kept in the accumulated information table 240, and the personal information stored in the management information table 220, there is calculated the stored value for reduction. Assume, for example, that the fare reduction of 50% applies to children who are five years old or younger. In this case, the date of birth 607 of the personal information 610 is compared with the date of entrance 904 of the exit information 903 to determine the age of the passenger. When the person is under six years old, one half of the fare indicated by the exit information is calculated as the amount of reduction (step 809). Next, a stored value equivalent to the amount of reduction attained in step 809 is added to the value in the stored value balance field 602 and the obtained stored value is stored in the balance field 602 (step 810).

[0015] Fig. 11 shows in a flowchart a procedure of processing in the ticket inspection machine 101, 102 when a passenger leaves a platform therethrough. The wicket controller 302 of the machine 101, 102 establishes communication between the IC card 103 and the IC card reader/writer 301 and then carries out a check there-

between (step 1201). Next, the controller 302 receives the entrance information from the IC card 103 (step 1202). Using the information of entrance station stored in the received entrance information, the controller 302 refers to the fare and distance calculation tables to calculate the distance and the fare between the start station and the pertinent station. Recorded in the fare table are the name of pertinent station and the fare between the station and each other station, for example, as shown in Fig. 12. Similarly, in the distance calculation table includes, for example, the name of pertinent station and the traveled distance between the station and each other station as shown in Fig. 13 (step 1203). Subsequently, the controller 302 creates exit information in accordance with the entrance information from the IC card 103, the fare and the traveled distance obtained in step 1203, the current time, and the name of pertinent station. The resultant exit information is sent from the reader/writer 301 to the IC card 103 (step 1204).

**[0016]** In conjunction with the embodiment above, description has been given of an example in which service points are assigned in accordance with the traveled distance and the accumulated distance traveled as well as in accordance with the age of the passenger. However, there may be implemented the following services in accordance with the present invention.

(1) In step 809 of Fig. 8, when the entrance station name and the exit station name match one of the nearest stations included in the personal information, a stored value is calculated for reduction to be added to the stored value balance. This makes it possible to reduce the fare of a particular railway section.

(2) When the age is equal to or more than a particular value in step 809 of Fig. 8, the fare is entirely added to the stored value balance. As a result, any passenger of a particular condition can travel free.

(3) In step 809 of Fig. 8, there is calculated lapsed years relative to the registration date in the personal information so that the increase rate of points is altered in accordance with the obtained lapsed years. For example, 5% is applied for the lapsed time from one year to two years and 10% is applied for the lapsed time equal to or more than two years.

(4) In step 809 of Fig. 8, when the job field indicates "student" in the personal information, the stored value is calculated for reduction and is added to the stored value balance. As a result, there can be achieved a reduction service equivalent to the reduction for students.

**[0017]** In accordance with the embodiment of the present invention as described above, in an IC card possessed by a passenger, there are kept a stored value and the service points corresponding to the traveled distance, the fare, or the like. When the passenger enters or leaves the platform through an automatic ticket in-

spection machine installed at a wicket of each station, the fare is subtracted from the stored value for the fare adjustment. Moreover, when the passenger enters or leaves the platform through an automatic ticket inspection machine, there is received information to calculate service points such that the service points are accumulated to be stored in the IC card. Thanks to the provision of the service processing system of the embodiment, the point services can be calculated and managed by the IC card without using the host system. Additionally, there can be accomplished a more precise point service in accordance with the passenger or customer and the utilization state thereof without utilizing the host system. The embodiment has been described as an example of the present invention. It is to be appreciated that the invention is not restricted by the embodiment.

**[0018]** While the present invention has been described with reference to the particular illustrative embodiment, it is not to be restricted by the embodiment but only by the appended claims. It is to be appreciated that those skilled in the art can change or modify the embodiment without departing from the scope and spirit of the present invention.

## Claims

1. A service processing system for providing services for customers and passengers of a traffic facility, comprising:

an IC card (103) possessed by a passenger, the card including  
storage means (205) for keeping therein a stored value assigned as an equivalent for utilization of a service and service points supplied in association with a utilization state of services and  
interface means (207) for conducting data communication with an external device;  
at least one automatic ticket inspection machine (101, 102) installed in each station of the traffic facility, the machine including  
a reader/writer (301) for accomplishing data communication with the IC card; and  
means (302) for transferring, when the passenger enters a platform through the machine of the station for the traffic facility, entrance information (Fig. 7, 501) related to the entrance station via the reader/writer to the IC card, and  
means (302) for receiving, when the passenger leaves a platform via the machine of the station, the entrance information from the IC card, creating exit information (Fig. 9, 903) representing a utilization state of the traffic facility in accordance with the entrance information, and transferring the exit information via the reader/writer to the IC card,

- the IC card including means (205, 207) for receiving the entrance information and keeping the entrance information and means (204, 201, 207) for receiving the exit information and calculating service points in accordance with the utilization state and the received exit information.
2. A service processing system in accordance with Claim 1, wherein:
- the exit information includes distance information (902) representing a distance of a section of the traffic facility traveled by the passenger; and the calculating means calculates the service points in accordance with the distance information.
3. A service processing system in accordance with Claim 1, wherein:
- the IC card further includes storage means (220) for keeping therein personal information (610) related to the passenger; and the calculating means calculates the service points in accordance with the exit information and the personal information.
4. A method of achieving a point service in association with a utilization state in a service processing system for use with a traffic facility including an IC card (103) possessed by a passenger and at least one automatic ticket inspection machine (101, 102) installed in each station of the traffic facility, comprising the steps of:
- transferring, from the automatic ticket inspection machine installed in a station in which a user enters a platform through the machine for the traffic facility, entrance information related to the entrance station to the IC card (402); keeping by the IC card the entrance information in storage means thereof (403); transferring the entrance information from the IC card to an automatic ticket inspection machine installed at a station in which the passenger leaves a platform through the machine (1202); creating, by the machine of the exit station, exit information representing a utilization state of the passenger in accordance with the entrance information and transferring the exit information to the IC card (1203, 1204); and calculating service points by the IC card in accordance with the utilization state and the exit information (807).
5. A method of achieving a point service in accordance with Claim 4, further including the step of:
- keeping, in the automatic ticket inspection machine, information representing distance between the station in which the machine is installed and each of other stations, wherein the exit information creating step includes calculating distance of a section traveled by the passenger in accordance with the entrance information, thereby creating exit information including the calculated distance.
6. A method of achieving a point service in accordance with Claim 5, wherein the service point calculating step includes the step of calculating service points in accordance with information of the distance.
7. A method of achieving a point service in accordance with Claim 4, further including the step of keeping personal information (610) related to the passenger in the IC card, wherein
- the service point calculating step includes calculating the service points in accordance with the exit information and the personal information.
8. A card-shaped device for use in a service of assigning service points in accordance with a utilization state of a customer, comprising:
- storage means (205) for keeping therein a stored value assigned as an equivalent for utilization of a service and service points supplied in association with a utilization state of services; interface means (207) for conducting data communication with an external device; means (205) for receiving via the interface means information representing the utilization state of services from the external device; and means for calculating the service points in accordance with information representing the utilization state.
9. The card-shaped device in accordance with Claim 8, further including:
- storage means (220) for keeping therein personal information (610) related to the customer, wherein the calculating means calculates the service points in accordance with the information representing the utilization state and the personal information.



FIG. 1

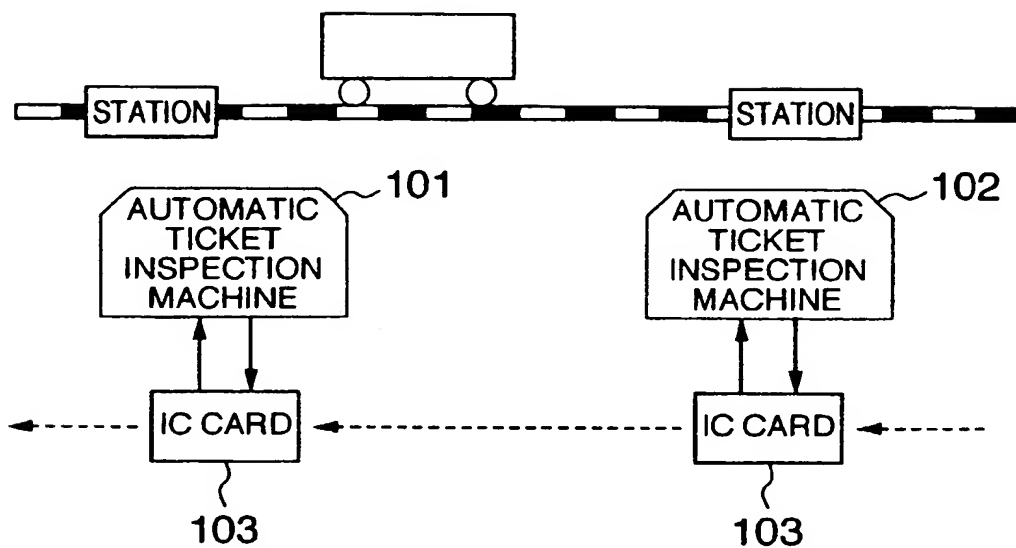


FIG. 2

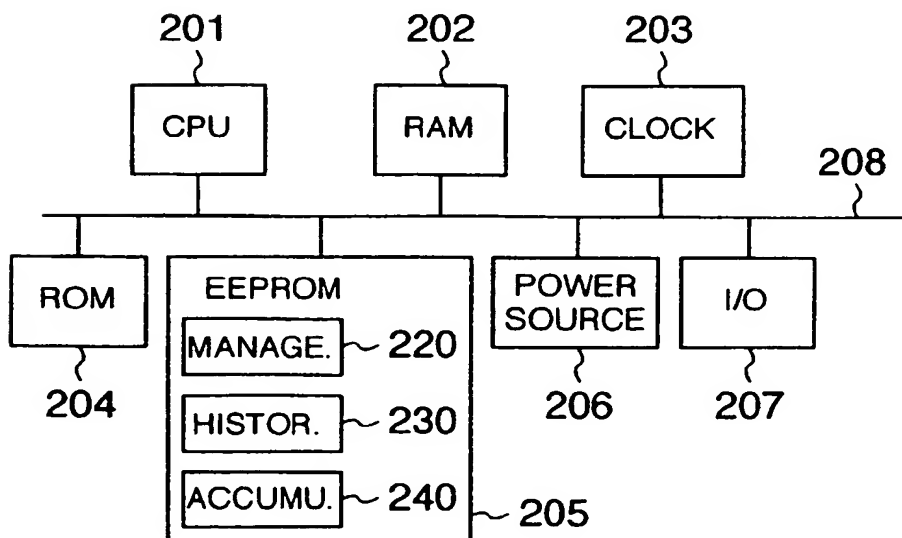


FIG. 3

220

PERSONAL INFORMATION	
NAME	KIKUCHI
ADDRESS	..., YOKOHAMA
DATE OF BIRTH	1990. 3. 5
TELEPHONE NO.	045-123-4567
OCCUPATION	PUPIL OF ELEMENTARY SCHOOL
SUBSCRIPTION DATE	1996. 4. 1
DATE OF ISSUANCE	1997. 2. 1
NEAREST STATION 1	KAWASAKI
NEAREST STATION 2	YOKOHAMA

610

ENTRANCE INFORMATION	
ENTRANCE DATE	1997. 3. 1
ENTRANCE TIME	12 : 30
ENTRANCE STATION NAME	YOKOHAMA

601

STORED VALUE BALANCE	2350
ACCUMULATED VALUE OF SERVICE POINTS	20

602  
603

FIG. 4

	1101	1102	1103	240
	ACCUMULATED DISTANCE TRAVELED	ACCUMULATED FARE	NO. OF TRAVELS	OTHERS
ACCUMULATION OF CURRENT MONTH	55	5, 620	8	
ACCUMULATION OF LAST MONTH	310	13, 260	25	
ACCUMULATION OF SECONDLAST MONTH	270	10, 230	32	
:	:	:	:	
:	:	:	:	

FIG. 5

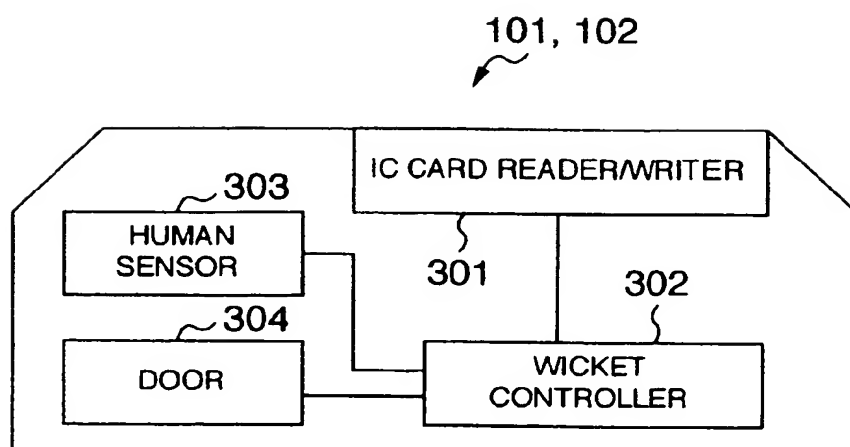


FIG. 6

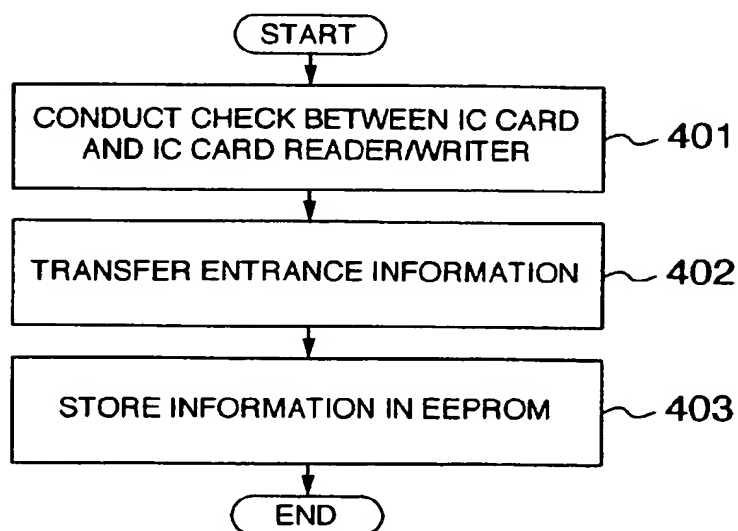


FIG. 7

ENTRANCE INFORMATION		501
ENTRANCE DATE	H9. 3. 1	502
ENTRANCE TIME	12 : 30	503
ENTRANCE STATION	YOKOHAMA	504
.		
.		

FIG. 9

EXIT INFORMATION		903
ENTRANCE DATE	1997. 3. 1	
ENTRANCE TIME	12 : 30	
ENTRANCE STATION NAME	YOKOHAMA	
EXIT TIME	13 : 05	
EXIT STATION NAME	KAWASAKI	
FARE	180	901
DISTANCE TRAVELED	20	902
.		

FIG. 8

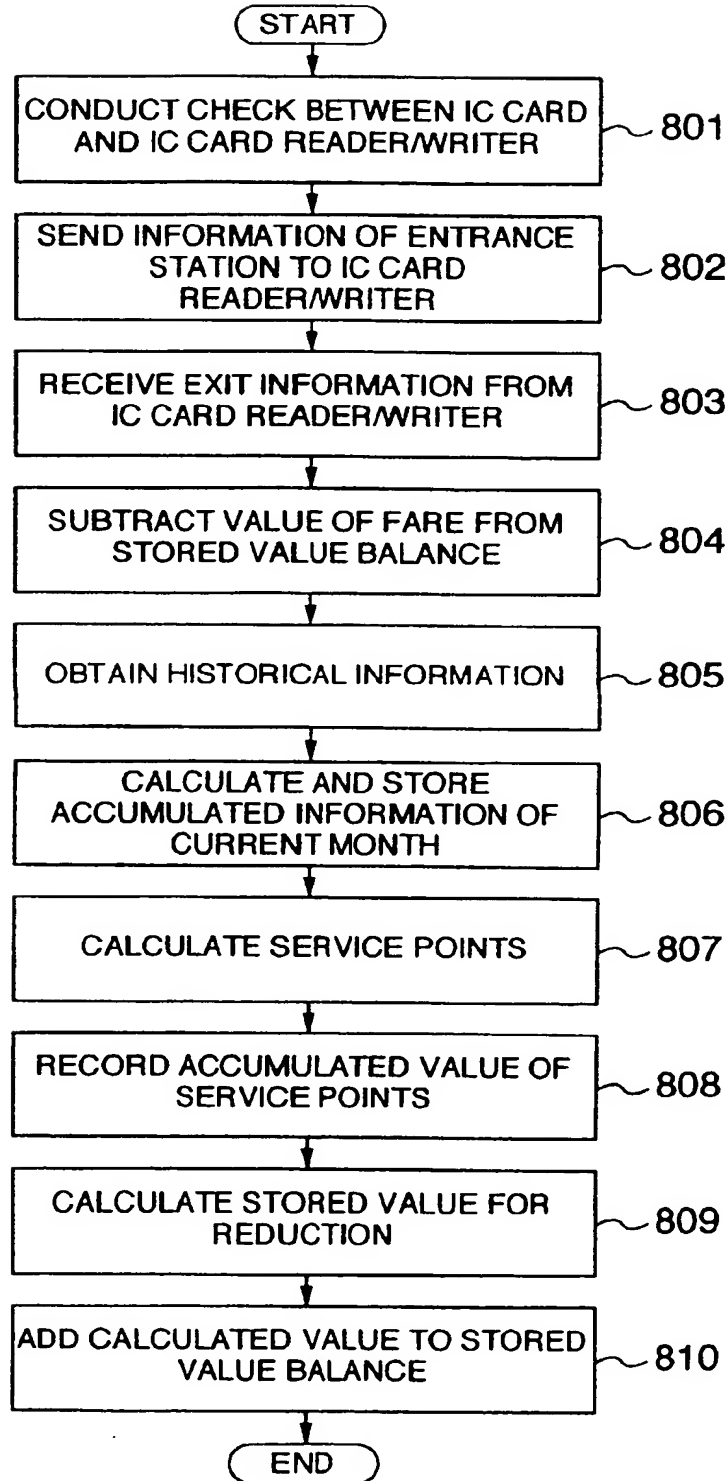


FIG. 10

HISTORICAL INFORMATION		
	ENTRANCE DATE	1997. 2. 15
	ENTRANCE TIME	11 : 15
	ENTRANCE STATION NAME	YOKOHAMA
	EXIT TIME	12 : 45
	EXIT STATION NAME	SHINAGAWA
	FARE	350
	DISTANCE TRAVELED	10. 5
	ENTRANCE DATE	1997. 3. 1
	ENTRANCE TIME	12 : 30
	ENTRANCE STATION NAME	YOKOHAMA
	EXIT TIME	13 : 05
	EXIT STATION NAME	KAWASAKI
	FARE	180
	DISTANCE TRAVELED	10. 5
	ENTRANCE DATE	
	ENTRANCE TIME	
	ENTRANCE STATION NAME	
	EXIT TIME	
	EXIT STATION NAME	
	FARE	
	DISTANCE TRAVELED	

FIG. 11

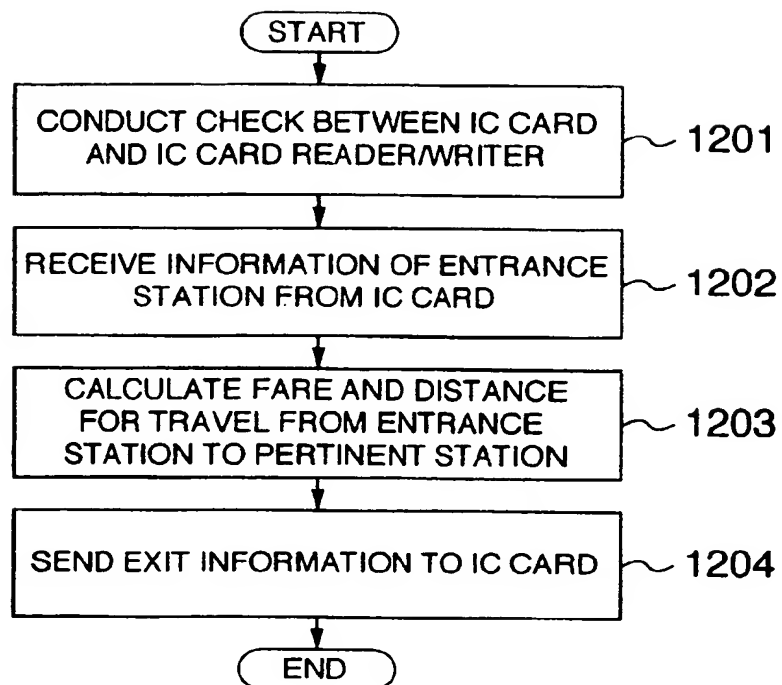


FIG. 12

PERTINENT STATION NAME	TOKYO	SHINBASHI	SHINAGAWA	YOKOHAMA	..	..
KAWASAKI	200	180	120	180	..	..

FIG. 13

PERTINENT STATION NAME	TOKYO	SHINBASHI	SHINAGAWA	YOKOHAMA	..	..
KAWASAKI	30	25	12	20	..	..

**This Page Blank (uspto)**



(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 911 762 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
05.09.2001 Bulletin 2001/36

(51) Int Cl.7: **G07B 15/00, G07B 15/02**

(43) Date of publication A2:  
28.04.1999 Bulletin 1999/17

(21) Application number: **98308561.4**

(22) Date of filing: **20.10.1998**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Kikuchi, Yoshinori**  
**Yokohama-shi (JP)**

(74) Representative: **Calderbank, Thomas Roger et al**  
**MEWBURN ELLIS**  
**York House**  
**23 Kingsway**  
**London WC2B 6HP (GB)**

(30) Priority: **21.10.1997 JP 28814897**


(71) Applicant: **Hitachi, Ltd.**  
**Chiyoda-ku, Tokyo (JP)**

**(54) A method of providing service for users and a service processing system for the same**

(57) A service processing system includes an IC card (103) possessed by a passenger and at least one automatic ticket inspection machine (101, 102) installed in each station of a traffic facility. The card includes a storage (205) for keeping therein a stored value assigned as an equivalent for utilization of a service and service points supplied in association with a utilization state of services and an interface unit (207) to achieve data communication with an external device. The machine (101, 102) includes a reader/writer (301) to communicate data with the IC card. The machine (101, 102) transfers, when the passenger enters a platform through

the machine of the station for the traffic facility, entrance information (Fig. 7, 501) related to the station to the IC card. The IC card keeps the entrance information and transfers, when the passenger leaves a platform via the machine of a destination station, the entrance information to the machine. In accordance with the entrance information, the machine creates exit information representing a state of utilization of the traffic facility and sends the exit information to the IC card. On receiving the exit information, the IC card calculates service points in accordance with the received exit information and the utilization state.

**FIG. 1**

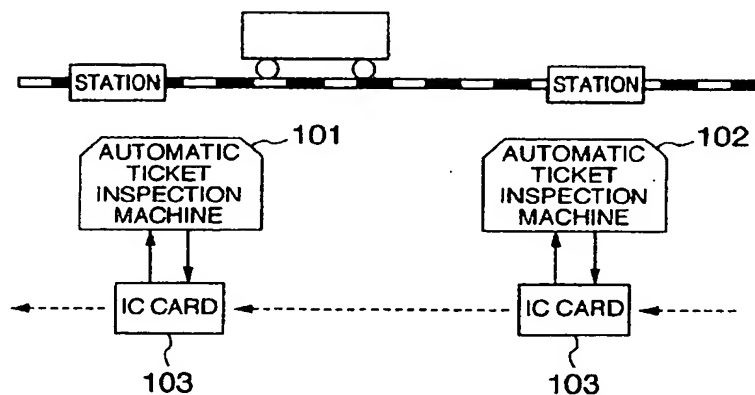

**EP 0 911 762 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 30 8561

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	EP 0 596 579 A (NEDAP NV) 11 May 1994 (1994-05-11) * the whole document *	1-9	G07B15/00 G07B15/02
Y	GB 2 246 896 A (TOKYO SHIBAURA ELECTRIC CO) 12 February 1992 (1992-02-12) * abstract * * page 9, last paragraph - page 15, last paragraph * * figures *	1-9	
A	PATENT ABSTRACTS OF JAPAN vol. 015, no. 088 (P-1174), 4 March 1991 (1991-03-04) & JP 02 304692 A (NEC CORP), 18 December 1990 (1990-12-18) * abstract *	1-9	
A	US 4 977 501 A (LEFEVRE JEAN PATRICK) 11 December 1990 (1990-12-11) * abstract * * column 2, line 29 - column 3, line 7 * * figures 1-3 *	1-9	
A	GB 2 267 626 A (WESTINGHOUSE CUBIC LIMITED) 8 December 1993 (1993-12-08) * abstract * * page 11, line 21 - page 13, last line * * figures *	1-3,8,9	TECHNICAL FIELDS SEARCHED (Int.Cl.6) G07B G07F G06F
A	US 5 578 808 A (TAYLOR DOUGLAS C) 26 November 1996 (1996-11-26) * column 2, line 25 - line 57 * * claims; figures *	1,4,8	
A	EP 0 762 341 A (NIPPON ELECTRIC CO) 12 March 1997 (1997-03-12) --- -/--		
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>13 July 2001</b>	Examiner <b>Miltgen, E</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C1)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 30 8561

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	WO 95 00928 A (VOS VERKEHRS OPTIMIERUNGS SYST ; SONDEREGGER WILHELM (AT); KUEHNE G) 5 January 1995 (1995-01-05) -----		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>13 July 2001</b>	Examiner <b>Miltgen, E</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04/01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8561

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-07-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0596579 A	11-05-1994	NL 9201924 A DE 69307991 D DE 69307991 T	01-06-1994 20-03-1997 21-08-1997
GB 2246896 A	12-02-1992	JP 2892111 B JP 4061433 A FR 2664075 A	17-05-1999 27-02-1992 03-01-1992
JP 02304692 A	18-12-1990	NONE	
US 4977501 A	11-12-1990	FR 2627610 A AT 88823 T AU 3016889 A DE 68906177 D DE 68906177 T EP 0330071 A ES 2040910 T KR 126288 B	25-08-1989 15-05-1993 24-08-1989 03-06-1993 05-08-1993 30-08-1989 01-11-1993 10-04-1998
GB 2267626 A	08-12-1993	NONE	
US 5578808 A	26-11-1996	US 5530232 A AU 700543 B AU 4573596 A CA 2170327 A CN 1138723 A DE 19607363 A GB 2298505 A,B	25-06-1996 07-01-1999 05-09-1996 29-08-1996 25-12-1996 19-09-1996 04-09-1996
EP 0762341 A	12-03-1997	JP 2705661 B JP 9073522 A JP 2768325 B JP 9081804 A KR 183491 B US 5831547 A	28-01-1998 18-03-1997 25-06-1998 28-03-1997 15-04-1999 03-11-1998
WO 9500928 A	05-01-1995	DE 4322160 A AT 150564 T AU 687413 B AU 7069994 A BR 9406960 A CA 2167517 A DE 59402166 D DK 706696 T EP 0706696 A ES 2102233 T	05-01-1995 15-04-1997 26-02-1998 17-01-1995 27-08-1996 05-01-1995 24-04-1997 06-10-1997 17-04-1996 16-07-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

EP 0 911 762 A3

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8561

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-07-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9500928 A		JP 9500745 T US 5920057 A	21-01-1997 06-07-1999

ESRUC WUDU 00452

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

***This Page Blank (uspto)***